


COIN VIBRATOR MOTOR

Features:

- Ultra Compact 8 & 10mm Diameter
- 3VDC Rated Voltage
- RoHS Compliant
- Operating Temperature Range -20°C - +70°C
- Storage Temperature Range -40°C - +85°C
- Insulation Resistance 10MW(min)
- Available with Wires or Connectors


Applications:

- Mobile Phones, Pagers & Other Communication Equipment
- Medical Instruments & Equipment
- Toys
- PDAs
- Shavers
- Personal Alarms

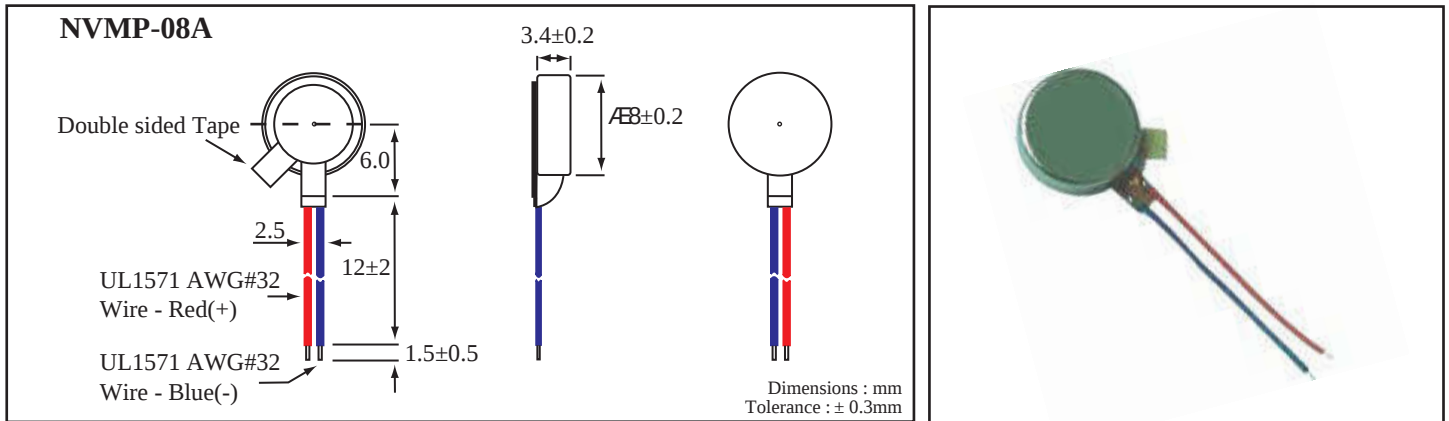

Electrical Characteristics:

Part Number	Rated Voltage (VDC)	Operating Voltage (VDC)	Standard Speed (r/min) Tested @ 3VDC	Standard Current (ma) Tested @ 3VDC	Starting Voltage (V)	Armature Resistance (W)	Mechanical Noise (dBA/10cm)	Rotating Direction
NVMP-08A	3	2.5 - 3.5	13500±2500	100	2.3	80	50	CW & CCW

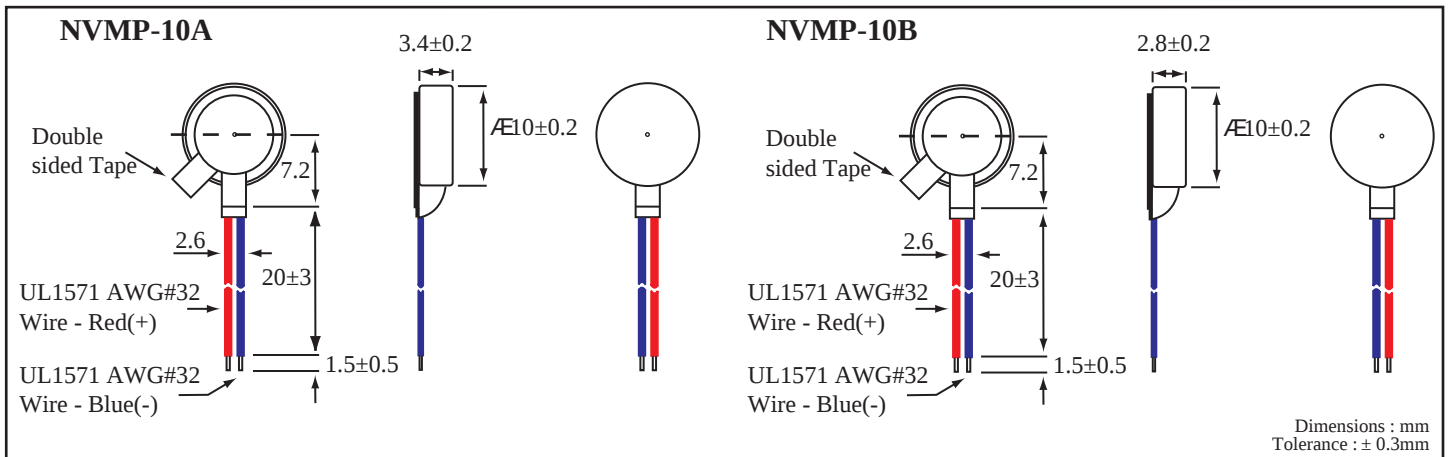

Electrical Characteristics:

Part Number	Rated Voltage (VDC)	Operating Voltage (VDC)	Standard Speed (r/min) Tested @ 3VDC	Standard Current (ma) Tested @ 3VDC	Starting Voltage (V)	Armature Resistance (W)	Mechanical Noise (dBA/10cm)	Rotating Direction
NVMP-10A	3	2.5 - 3.5	12000±2500	90	2.3	80	42	CW & CCW
NVMP-10B	3	2.5 - 3.5	12000±2500	90	2.3	80	42	CW & CCW

Specification subject to change without prior notice



Unit 8, Campus Five, Third Avenue, Letchworth, Hertfordshire SG6 2JF England

Tel: +44(0)1462 677886 Fax: +44(0)1462 677499

email: sales@nicomatic.co.uk http: //www.nicomatic.co.uk

May 06/01